Product Datasheet








TFLマウントからCANONEFマウント（GPIOおよび電源付き）「BIRGER」アダプター

このレンズアダプターを使用すると、CanonEFマウントレンズをAtlas10 / Atlas TFLマウントカメラに接続できます。 M8コネクタを使用すると、ユーザーはシリアルコマンドを使用してレンズの焦点を電子的に合わせることができます。 NAまたはEU電源が付属しています。

寸法	直径: ø 76.2 mm, 長さ: 34.5 mm
重量	25 g (アダプタとM8 GPIO部のみ)

Instructions on how to install and operate the TFL to EF mount Birger adapter please visit our **KB Article "**[Using LUCID's TFL to EF Lens Controller](#)**"**. This KB Article will explain the serial commands used to control and focus a Canon EF lens attached to the adapter on an Atlas TFL-mount model.

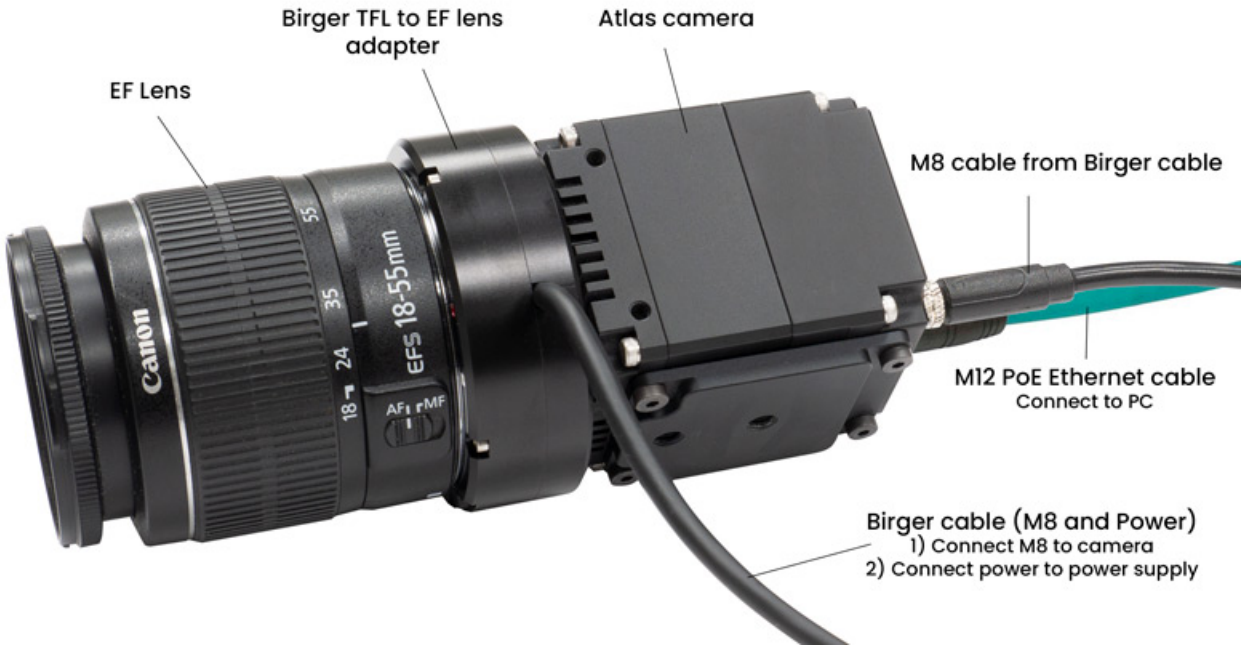


Read full instructions "[Using LUCID's TFL to EF Lens Controller](#)" (support.https://thinklucid.com)

© LUCID Vision Labs, Incorporated. All rights reserved. Phoenix, Triton, Atlas, Arena, ArenaView and other names and marks appearing on the products herein are either registered trademarks or trademarks of Lucid Vision Labs, Inc. and/or its subsidiaries. Subject to change without notice. Document generated: 11月 3, 2026

Product Datasheet

技術図面

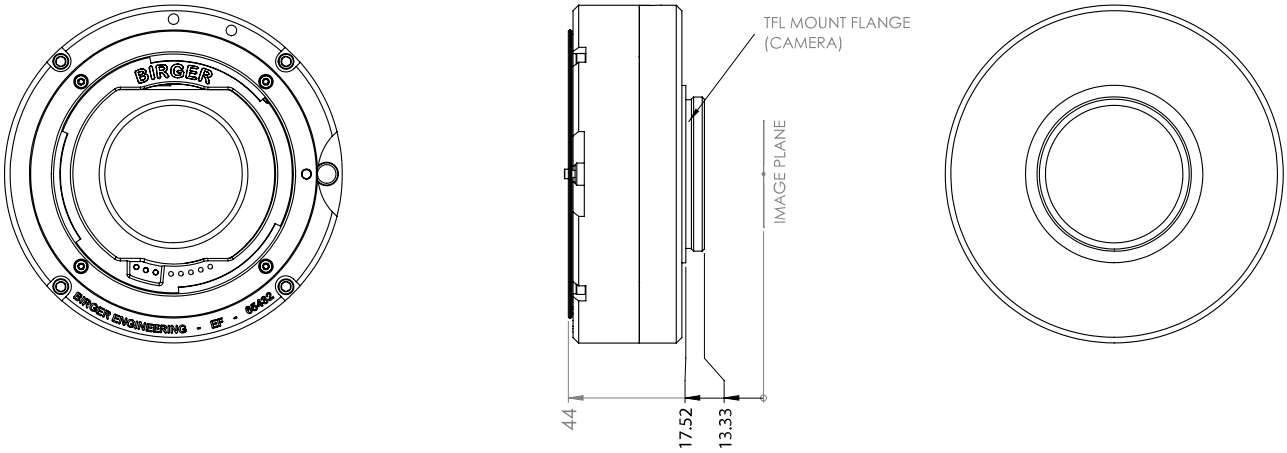

© LUCID Vision Labs, Incorporated. All rights reserved. Phoenix, Triton, Atlas, Arena, ArenaView and other names and marks appearing on the products herein are either registered trademarks or trademarks of Lucid Vision Labs, Inc. and/or its subsidiaries. Subject to change without notice. Document generated: 11月 3, 2026